

# Ultimaker TPU 95A

## Technical data sheet

### General overview

---

<b>Chemical composition</b>	See Ultimaker TPU 95A safety data sheet, section 3
<b>Description</b>	Highly versatile for industrial applications, Ultimaker TPU 95A filament is the go-to choice for a wide array of manufacturing projects that demand the qualities of both rubber and plastic. Designed for 3D printing consistency, Ultimaker TPU 95A is a semi-flexible and chemical resistant filament with strong layer bonding.
<b>Key features</b>	Exceptional wear and tear resistance, high impact strength, Shore A hardness of 95, up to 560% elongation at break, and good corrosion resistance to many common industrial oils and chemicals.
<b>Applications</b>	Functional prototyping, grips, guides, hinges, sleeves, snap-fit parts, and protective cases
<b>Non-suitable for</b>	Food contact applications and in vivo applications. Long term UV and/or moisture immersion and applications where the printed part is exposed to temperatures higher than 116 °C

### Filament specifications

---

	<b>Method (standard)</b>	<b>Value</b>
<b>Diameter</b>	-	2.90 ± 0.13 mm
<b>Max roundness deviation</b>	-	0.07 mm
<b>Net filament weight</b>	-	750 g
<b>Filament length</b>	-	~ 96 m

### Color information



---

<b>Color</b>	<b>Color code</b>
White	RAL 9010
Black	RAL 9005
Red	RAL 3031
Blue	RAL 5002

# Mechanical properties

All samples were 3D printed. See 'Notes' section for details.

	Test method	Typical value		
		XY (Flat)	YZ (Side)	Z (Up)
Tensile (Young's) modulus	ASTM D3039 (1 mm / min)	67 ± 6 MPa	67 ± 2 MPa	56 ± 3 MPa
Tensile stress at yield	ASTM D3039 (50 mm / min)	No yield	No yield	No yield
Tensile stress at break	ASTM D3039 (50 mm / min)	23.7 ± 2.1 MPa	37.9 ± 1.6 MPa	6.4 ± 0.5 MPa
Elongation at yield	ASTM D3039 (50 mm / min)	No yield	No yield	No yield
Elongation at break	ASTM D3039 (50 mm / min)	>560%	>700%	82.3 ± 18.4%
Flexural modulus	ISO 178 (1 mm / min)	62.6 ± 1.7 MPa	55.1 ± 2.4 MPa	62.6 ± 2.0 MPa
Flexural strength	ISO 178 (5 mm / min)	4.1 ± 0.0 MPa at 9.4% strain	3.8 ± 0.1 MPa at 9.8% strain	4.3 ± 0.1 MPa at 9.7% strain
Flexural strain at break	ISO 178 (5 mm / min)	No break (>10%)	No break (>10%)	No break (>10%)
Charpy impact strength (at 23 °C)	ISO 179-1 / 1eB (notched)	36.0 ± 6.6 kJ/m <sup>2</sup>	-	-
Hardness	ISO 7619-1 (Durometer, Shore D)	48 Shore D	-	-
	ISO 7619-1 (Durometer, Shore A)	96 Shore A	-	-

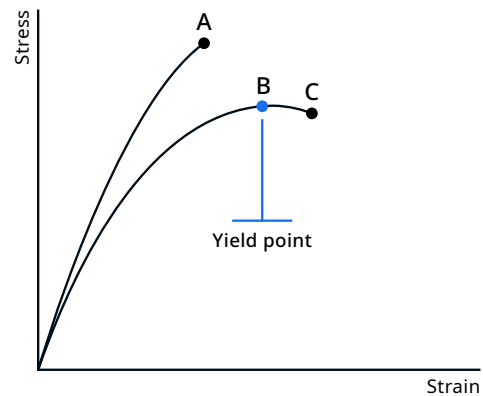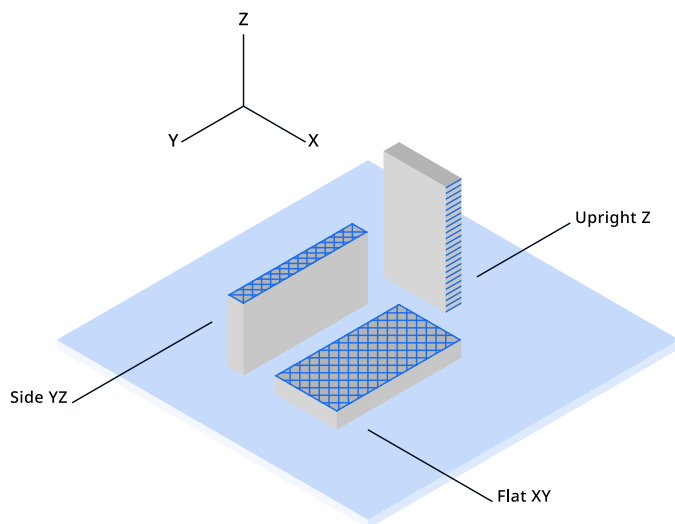

- A. Tensile stress at break, elongation at break (no yield point)
- B. Tensile stress at yield, elongation at yield
- C. Tensile stress at break, elongation at break

## Print orientation

As the FFF process produces part in a layered structure, mechanical properties of the part vary depending on orientation of the part. In-plane there are differences between walls (following the contours of the part) and infill (layer of 45° lines). These differences can be seen in the the data for XY (printed flat on the build plate - mostly infill) and YZ (printed on its side - mostly walls). Additionally, the upright samples (Z direction) give information on the strength of the interlayer adhesion of the material. Typically the interlayer strength (Z) has the lowest strength in FFF.

Note: All samples are printed with 100% infill - blue lines in the illustration indicate typical directionality of infill and walls in a printed part.

## Tensile properties

Printed parts can yield before they break, where the material is deforming (necking) before it breaks completely. When this is the case, both the yield and break points will be reported. Typical materials that yield before breaking are materials with high toughness like Tough PLA, Nylon and CPE+.

If the material simply breaks without yielding, only the break point will be reported. This is the case for brittle materials like PLA and PC Transparent, as well as elastomers (like TPU).

## Thermal properties

---

Samples marked with an asterisk (\*) were 3D printed. See 'Notes' section for details.

	Test Method	Typical value
Melt mass-flow rate (MFR)	ISO 1133 (225 °C, 1.2 kg)	15.9 g / 10 min
Heat deflection (HDT) at 0.455 MPa*	ISO 75-2 / B	50.3 ± 1.1 °C
Vicat softening temperature*	ISO 306 / A120	115.7 ± 0.9 °C
Glass transition	ISO 11357 (DSC, 10 °C / min)	-
Melting temperature	ISO 11357 (DSC, 10 °C / min)	216.8 °C

## Other properties

---

Specific gravity	ASTM D782	1.22 g / cm <sup>3</sup>
------------------	-----------	--------------------------

## Notes

---

\*3D Printing: all samples were printed using a new spool of material loaded in an Ultimaker S5 Pro bundle with engineering intent profiles using 0.15 mm layer height with AA0.4 printcore and 100% infill, using Ultimaker Cura 4.9. Samples were printed 'one-at-a-time'. Printed samples were conditioned in room temperature for at least 24h before measuring.

Specimen dimensions (L x W x H):

- Tensile test: 215 x 20 x 4 mm
- Flexural/Vicat/HDT: 80 x 10 x 4 mm
- Charpy: 80 x 10 x 4 mm with printed Notch (Type 1eB)

## Disclaimer

---

Any technical information or assistance provided herein is given and accepted at your risk, and neither Ultimaker nor its affiliates make any warranty relating to it or because of it. Neither Ultimaker nor its affiliates shall be responsible for the use of this information, or of any product, method or apparatus mentioned, and you must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. No warranty is made of the merchantability or fitness of any product; and nothing herein waives any of Ultimaker's conditions of sale. Specifications are subject to change without notice.

Version	v2.00
Date	April 29, 2022